

# 12k Two-Post Lift

AUTOMOTIVE  
TWO-POST  
LIFT SYSTEMS



## 12k Two-Post Lift Specifications

(EELR738A)

### EELR738A

- Capacity: 12,000 lbs (5443kg)
- Rise height\* (A): 78.125" (198cm)
- Overall height - adjustable (B): 166"/175" (422/445cm)
- Overall width (C): 139.75" (355cm)
- Drive thru width (D): 103" (262cm)
- Floor to overhead shut off (E): 159.5"/168.5" (405-428cm)
- Front and Rear arm reach (F & G): 35.75" - 54.5" (91 - 139cm)
- Screw pad height (H): 5.25" to 7.25" (13 - 18cm)
- Inside column width (K): 115" (292cm)
- Ceiling height requirement: 167" or 176" (424 or 447cm)
- Rise time: 66 seconds
- Power requirements\*\*: 208-230V 1Ph 60Hz
- Max load per arm: 3000 lbs (1360kg)

\*Rise height is measured with high extension \*\*Optional three phase electrical also available, specify at time of order  
Note: Optional 24" height extension kit (EAK0299T44A) adds to overall height, floor to overhead shut off and ceiling height requirements from standard  
Frame engaging adapters EAK0299T25A or EAK0299T24A are required when lifting vehicles with frame construction

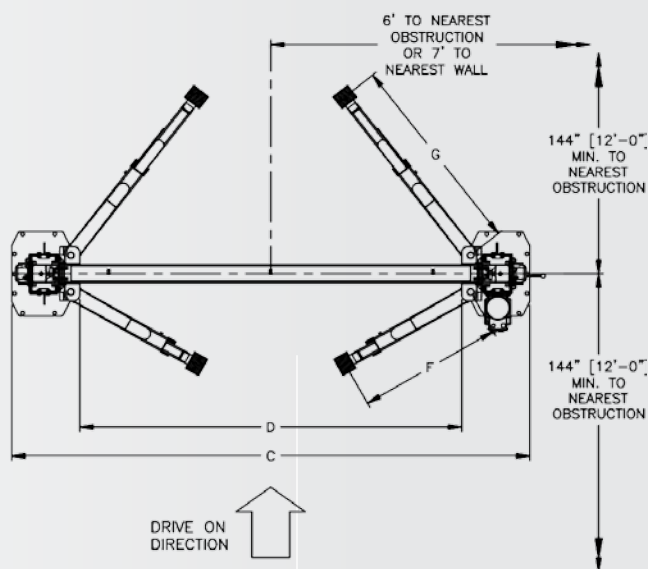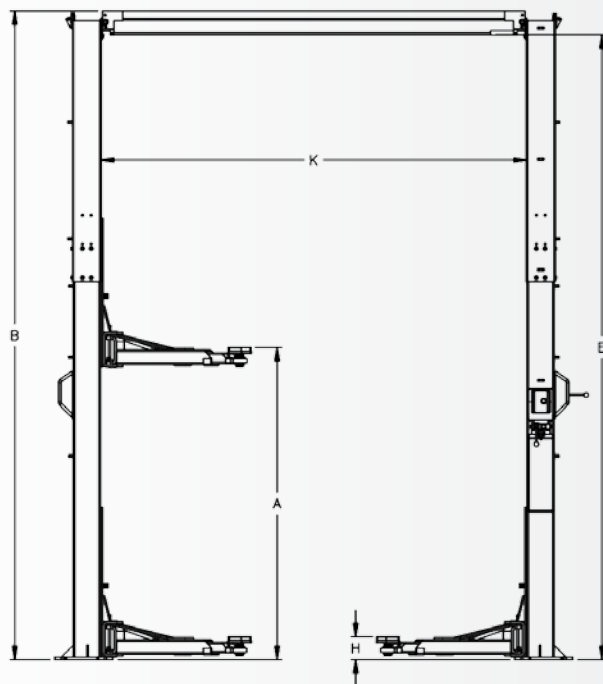

Hofmann is committed to product innovation and improvement. Therefore, specifications listed in this brochure may change without notice. ©2014 Snap-on Incorporated. Hofmann is a registered trademark of Snap-on Equipment GmbH. All Rights Reserved. All other marks are marks of their respective holders. 05/14 SS143421

#### Hofmann USA

309 Exchange Avenue  
Conway, AR 72032  
800.362.4618  
Int: 501.505.2739  
www.hofmann-usa.com

#### Hofmann Canada

6500 Millcreek Dr  
Mississauga ON L5N 2W6  
800.362.4608  
www.hofmann.ca

# HOFMANN®

