

HOFMANN®




FPA14172

4-Post

ALIGNMENT LIFTS

HOFMANN 12K 4-POST LIFTS

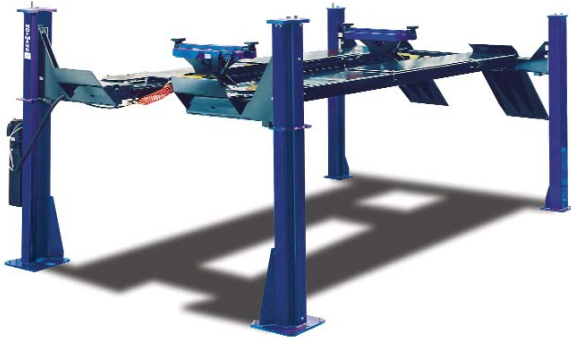

Alignment level at 21 positions or flat deck version for multi-purpose vehicle servicing.

Factory-installed air kit for optional Roller Jacks and air tools.

65" full-floating rear slip plates for longer wheelbase potential.

Triple Safety System: Safety locks in each column with single-point release, auto-engaging mechanical drop locks, and velocity fuses on all hydraulically-operated components.

Quality Meets Durability with Hofmann 4-Post Lifts

- Patented roll-formed front towers with Dura-Glide lifting system – integrates low-wear, Ultra-High Molecular-Weight polyethylene glide blocks to ensure long-term alignment accuracy.
- 172" or 210" wheelbase models available.
- Heavier $\frac{5}{16}$ ", 6 x 37 pre-stressed cables for long life and added safety.
- 24" Pro-Style decks for wide-track vehicles and no deck adjustment.
- Hidden lifting cylinder under the deck adds accessibility and no vehicle door damage.
- Larger 8" cast iron pulleys and fiber-wound bushings for less wear and longer cable life.
- Multi-position nylon polyethylene slip plate cage with Delrin™ bearings for improved wear and serviceability.
- Longer 52" approach ramps provide gentle drive-on angle for low-profile vehicles.
- Optional heavy-duty premium turntables increase alignment profitability.



FPOA12172
FPOA12210



Shown With Optional Roller Jacks and Turntables

HOFMANN 14K 4-POST LIFTS



Alignment level at 21 positions or flat deck version for multi-purpose vehicle servicing.



Factory-installed air kit for optional Roller Jacks and air tools.

65" full-floating rear slip plates for longer wheelbase potential.

Triple Safety System: Safety locks in each column with single-point release, auto-engaging mechanical drop locks, and velocity fuses on all hydraulically-operated components.

Solid, Rugged Construction Promises Years of Reliable and Dependable Use

- Patented roll-formed front towers with Dura-Glide lifting system – integrates low-wear, Ultra-High Molecular-Weight polyethylene glide blocks to ensure long-term alignment accuracy.
- Wide, open front facilitates easy access - expands service potential and profitability.
- 172" or 210" wheelbase models available.
- Heavier $\frac{5}{16}$ ", 6 x 37 pre-stressed cables for long life and added safety.
- 24" Pro-Style decks for wide-track vehicles and no deck adjustment.
- Hidden lifting cylinder under the deck adds accessibility and no vehicle door damage.
- Larger 8" cast iron pulleys and fiber-wound bushings for less wear and longer cable life.
- Multi-position nylon polyethylene slip plate cage with Delrin™ bearings for improved wear and serviceability.
- Longer 52" approach ramps provide gentle drive-on angle for low-profile vehicles.
- Optional heavy-duty premium turntables increase alignment profitability.



FPA14172
FPA14210



Shown With Optional Roller Jacks and Turntables

HOFMANN 18K 4-POST LIFTS



Alignment level at 21 positions or flat deck version for multi-purpose vehicle servicing.

Factory-installed air kit for optional Roller Jacks and air tools.

65" full-floating rear slip plates for longer wheelbase potential.

Triple Safety System: Safety locks in each column with single-point release, auto-engaging mechanical drop locks, and velocity fuses on all hydraulically-operated components.

The Heavyweight of Hofmann 4-Post Lifts

- Patented roll-formed front towers with Dura-Glide lifting system – integrates low-wear, Ultra-High Molecular-Weight polyethylene glide blocks to ensure long-term alignment accuracy.
- Built-in anti-sway system.
- Heavier $\frac{5}{16}$ " , 6 x 37 pre-stressed cables for long life and added safety.
- 24" Pro-Style decks for wide-track vehicles and no deck adjustment.
- Hidden lifting cylinder under the deck adds accessibility and no vehicle door damage.
- Larger 8" cast iron pulleys and fiber-wound bushings for less wear and longer cable life.
- Multi-position nylon polyethylene slip plate cage with Delrin™ bearings for improved wear and serviceability.
- Longer 52" approach ramps provide gentle drive-on angle for low-profile vehicles.
- Optional heavy-duty premium turntables increase alignment profitability.
- 87" to 143" wheelbase for 4-wheel alignment and 210" wheelbase for 2-wheel alignment.



FPA18210
FPF18210



Shown With Optional Roller Jacks and Turntables

OPTIONAL ACCESSORIES



RJ207

Roller Jacks

Hofmann's complete line of air/hydraulic Roller Jacks are versatile, durable, and optimize the profitability of any lift. A low-profile design eliminates the need to swing away when the lift is lowered. A high lifting height enables more access for under-car repairs. Interchangeable adapters make "wheel-free" lifting fast for brake work and tire service on passenger cars, light trucks and vans. Easy to maintain – built to last.


Turntables

Premium turntables for most lift applications.



EAK0289J06A

FEATURES



65" Rear Slip Plates

With multi-position nylon polyethylene plate cage and Delrin™ bearings.



Roll-Formed Steel Columns

For significantly increased column strength.

8" Heavy-Duty Cast Iron Pulley

With fiber-wound bushings for longer cable and pulley life.



9/16" Pre-Stressed Cables

For added strength on 4-Post Lifts.



4-Post Alignment Lifts

HOFMANN®



SPECIFICATIONS

	FPOA12172	FPOA12210	FPA14172	FPA14210	FPA18210	FPF18210†
Capacity	12,000 lbs.	12,000 lbs.	14,000 lbs.	14,000 lbs.	18,000 lbs.	18,000 lbs.
Front Accessibility	Open	Open	Open	Open	Closed	Closed
Roller Jack	RJ216	RJ216	RJ207	RJ207	RJWT9	RJWT9
Max. 4-Wheel Alignment Wheel Base	144"	144"	144"	144"	144"	144"
Max. 2-Wheel Alignment Wheelbase	172"	210"	172"	210"	210"	210"
Deck Surface	204"	242"	204"	242"	242"	242"
Deck Width	24"	24"	24"	24"	24"	24"
Distance Between Decks	36"	36"	36"	36"	40"	40"
Overall Width	148"	148"	148"	148"	149 ½"	149 ½"
Overall Length	266"	303 ½"	266"	303 ½"	303 ½"	303 ½"
Max. Raised Height	71"	71"	71"	71"	72"	72"
Max. Lowered Height	10"	10"	10"	10"	10"	10"
Lifting Time	64 sec.	64 sec.	64 sec.	64 sec.	64 sec.	64 sec.
Shipping Weight	4,300 lbs.	5,010 lbs.	4,600 lbs.	5,000 lbs.	5,450 lbs.	5,200 lbs.
Power Requirements*	230V, 1Ph	230V, 1Ph	230V, 1Ph	230V, 1Ph	230V, 1Ph	230V, 1Ph

* Other Power Configurations Available

† Non-Alignment/Flat Deck/General Service

Hofmann manufactures a complete line of wheel service equipment.



Combination brake lathes for rotors, drums and flywheels



Portable Imaging Alignment Systems



Wheel Balancers

HOFMANN®

USA



309 Exchange Avenue • Conway, AR 72032
(800) 251-4500 • (501) 505-2662
Fax (501) 450-2085 • www.hofmann-usa.com

HOFMANN®

Canada



6500 Millcreek Drive • Mississauga, ONT L5N 2W6
(800) 267-2185
Fax (905) 821-2073 • www.hofmann.ca